
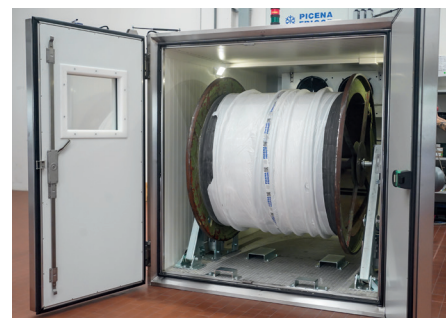


# FRIGORIFERO PER TRECCIATRICI E SPIRALATRICI SU MANDRINO FLESSIBILE CON CARICAMENTO DELLA BOBINA

REFRIGERATOR FOR BRAIDING AND BINDING MACHINES  
FLEXIBLE MANDREL WITH SPOOL LOADING

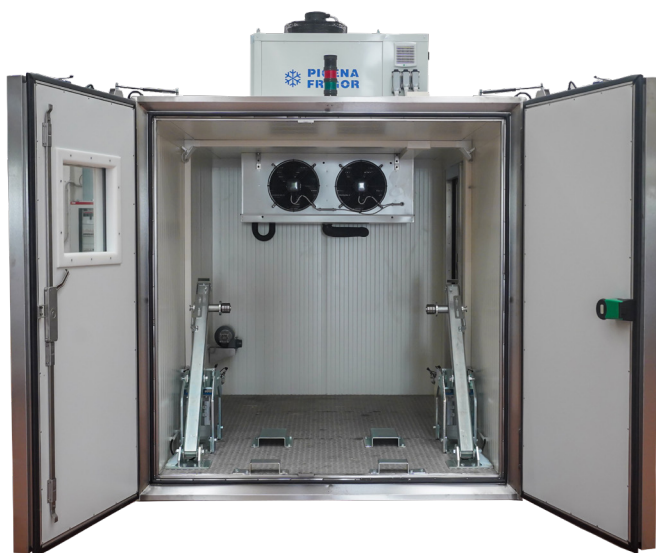

**Box frigoriferi progettati per il raffreddamento del sottostrato su mandrino flessibile, prima del rinforzo mediante macchine trecciatrici o spiralmatrici. Il frigorifero è posto all'inizio della linea e consente il caricamento completo della bobina di sottostrato.**

**Il range di temperatura in camera è impostabile da  $\pm 10^{\circ}\text{C}$  a  $-30^{\circ}\text{C}$  in modo che il sottostrato giunga alla trecciatrice o spiralmatrice con la corretta temperatura di produzione.**

Refrigeration system designed for cooling the underlayer on flexible spindle, prior to support provided by braiding or binding machines. The refrigerator placed at the beginning of the line allows complete spool loading.

The temperature range in the chamber can be set from  $+10^{\circ}\text{C}$  to  $-30^{\circ}\text{C}$ , that underlayer reaches the braiding or binding machine with the correct manufacturing temperature.



		<b>TR PIC3-A</b>	<b>TRI PIC3-A</b>	<b>TR PIC4-A</b>	<b>TRI PIC4-A</b>
Compressore	Compressor	Semi - hermetic 4HP	Semi - hermetic 4HP	Semi - hermetic 10HP	Semi - hermetic 10HP
Controllo compressore	Compressor check	ON/OFF	Inverter	ON/OFF	Inverter
Controllo frigorifero	Refrigerator check	PLC + Touch screen	PLC + Touch screen	PLC + Touch screen	PLC + Touch screen
Setup temperatura	Temperature setup	+10 -30 °C	+10 -30 °C	+10 -30 °C	+10 -30 °C
Max temperatura ambiente	Max ambient temperature	35 °C	35 °C	35 °C	35 °C
Sbrinamento	Defrosting	Electric + hot gas	Electric + hot gas	Electric + hot gas	Electric + hot gas
Refrigerante	Cooling	R452A	R452A	R452A	R452A
Dim. Max esterne (mm)	Max. outer dimensions (mm)	2250x3100x2780 h	2250x3100x2780 h	2250x3100x2850 h	2250x3100x2850 h